


A.1.2 Type B

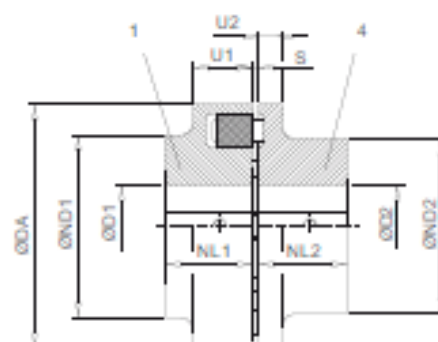

1 Coupling part 1

4 Coupling part 4

Figure A-2 Type B

Table A-2 Speeds, geometry data and weights of type B

Size	Speed n_{max} rpm	Maximum bore ¹⁾		DA mm	ND1 mm	ND2 mm	NL1 / NL2 mm	S mm	U1 mm	U2 mm	Weight ²⁾ m kg
		D1 mm	D2 mm								
58	7 500	19	24	58	58	40	20	2 ... 4	20	8	0.4
68	7 000	24	28	68	68	50	20	2 ... 4	20	8	0.54
80	6 000	30	38	80	80	68	30	2 ... 4	30	10	1.3
95	5 500	42	42	95	76	76	35	2 ... 4	30	12	2.2
110	5 300	48	48	110	86	86	40	2 ... 4	34	14	3.3
125	5 100	55	55	125	100	100	50	2 ... 4	36	18	5.2
140	4 900	60	60	140	100	100	55	2 ... 4	34	20	5.6
160	4 250	65	65	160	108	108	60	2 ... 6	39	20	7.8
180	3 800	75	75	180	125	125	70	2 ... 6	42	20	11.5
200	3 400	85	85	200	140	140	80	2 ... 6	47	24	16
225	3 000	90	90	225	150	150	90	2 ... 6	52	18	20
250	2 750	100	100	250	165	165	100	3 ... 8	60	18	29
280	2 450	110	110	280	180	180	110	3 ... 8	65	20	38

¹⁾ Maximum bore for parallel keyway in accordance with DIN 6885/1.

²⁾ Weight applies to one coupling with maximum bore.